

TBM101K

10.1" Healthcare Rugged Tablet PC with Intel® Celeron® N6211



KEY FEATURES

- Intel® Elkhart Lake Celeron® N6211 Processor
- 10.1" 1920 x 1200 IPS LED Panel with direct optical bonding
- Lightweight, low power consumption, rugged, IP65 waterproof and dustproof
- Removable battery with hot-swap function for all day productivity
- Stylus, glove, and wet-touch modes fulfilling multiple medical operations
- In compliance with IEC/EN 60601-1, IEC/EN 60601-1-2, UL 60601-1
- Housing enhanced with antimicrobial properties
- USB Type-C port supports power delivery

INTRODUCTION

NoteStar Healthcare Rugged Tablet Series is designed to meet the rigorous demands of medical environments, offering reliable performance with Android and Windows operating systems. Featuring lightweight, antimicrobial housings and IP65-rated water and dust resistance, these tablets ensure durability and hygiene. With 10.1" high-resolution displays, hot-swappable batteries, and optional barcode scanners, they enhance efficiency for patient care, medication management, and data collection, making them essential tools for healthcare professionals.

OVERVIEW



Meeting International Safety Standards

NoteStar's Healthcare Tablet meets international healthcare and patient safety standards, essential for reducing risks such as overheating, electric shocks and electromagnetic interference in medical devices.

Enhanced Healthcare Tablets with Antibacterial Protection

NoteStar's thin and light healthcare tablets feature antibacterial properties to inhibit bacterial growth and resist various cleaning chemicals. The waterproof design ensures that the tablets can be cleaned with wipes, sprays, and liquids without compromising internal components.



Multifunctional Display for Diverse Conditions

The TBM101K features a lightweight, portable design with a 10.1-inch screen that supports stylus, glove, and rain modes, ensuring exceptional performance in various settings. With a high display resolution of 1920 x 1200, this device delivers clear and detailed visuals. It is particularly suitable for medical and industrial applications, offering a reliable and versatile user experience.



Hot-Swappable Battery for Continuous Operation

The healthcare-grade tablet includes a removable battery with a hot-swap function, ensuring uninterrupted productivity throughout the day. The USB Type-C port supports power delivery and efficient charging.

SPECIFICATIONS

| Display | | | |
|----------------------|---|-----------------------|--|
| Resolution | 1920x1200 | Size | 10.1 inches |
| Contrast Ratio | 800:1 | Panel Brightness | 800.0 nits |
| View Angles | 85,85,85,85 | Type | Projected Capacitive Multi Touch |
| Viewability | Anti-Glare touch treatment | Bonding | Optical Bonding for Sunlight Viewability |
| System Specification | | | |
| Processor | Intel Celeron N6211 @1.20 GHz (up to 3.00 GHz) Intel Pentium N6415 @1.20 GHz (up to 3.00 GHz) (Optional) | Memory | 4GB LPDDR4 8GB LPDDR4 (Optional) |
| Storage | 128GB SSD Additional storage available with micro SDXC card slot 256GB SSD (Optional) 512GB SSD (Optional) | Security | Trusted Platform Module (TPM) 2.0 Kensington Lock |
| Operating System | Windows 10 IoT Enterprise LTSC (64 bit) Windows 11 IoT Enterprise LTSC (64 bit) (Optional) | WLAN | Support |
| BT | Support | WWAN | 4G (Optional) 5G (Optional) |
| GNSS | GPS, GLONASS, Galileo, BeiDou | RFID | HF RFID 13.56 MHz reader (Optional) add-on UHF RFID Reader (Optional) |
| Sensors | Light sensor/ G-sensor / Gyro | Smart Card Reader | Add-on Smart Card Reader (Optional) |
| Camera | | | |
| Front Camera | 2MP Front Camera | Rear Camera | 8MP Rear Camera with auto-focus and LED light |
| Mechanical | | | |
| Dimension | 271.9 x 197.3 x 19.5 mm | Weight | 1.2 kg (2.65 lbs) with standard battery, 1.4 kg (3.1 lbs) with optional high capacity battery |
| Cooling System | Fanless Design | Housing | Housing enhanced with antimicrobial properties |
| IO Ports | | | |
| USB Port | 1 x USB 3.0 (Type A), 1 x USB 3.0 (Type-C support Power Delivery 20V In) | SD Card Slot | 1 x Micro SD Card slot (Support SDXC) |
| SIM Card Slot | 1 x SIM card slot | Video | 1 x Micro HDMI Output (Optional) |
| Audio | 1 x Audio combo 3.5mm audio combo jack (Mic in or Line Out) Dual Digital Mic With Noise Cancellation Dual Speaker | Expansion Port | 1 x Expansion connector (Optional) |
| Indicator | 4x LED Indicator for Power, Battery, HDD, RF status | Docking Connector | 1 x 19-pin docking connector |
| Environment | | | |
| Operating Humidity | 10% to 90% RH, non-condensing | Operating Temperature | 0 to 35°C |
| Storage Temperature | -30°C to 70°C (-22°F to 158°F) | Shock | MIL-STD-810G Method 516.6 Procedure I |
| Vibration | MIL-STD-810G Method 514.6 Procedure I | IP rating | IP65 |
| Drop | MIL-STD-810G Method 516.6, 4 ft | | |
| Certification | | | |
| Certification | CE, FCC, IEC/EN 60601-1, IEC/EN 60601-1-2, UL 60601-1 | | |
| Control | | | |
| Button | 1 x Power, 1 x Home, 2 x Volume, | | |

2 x Programmable Function Keys


Barcode Scanner

Barcode Scanner 1D/2D barcode reader (Optional)

Power

| | | | |
|---------------------|---|-------------------------------|----------------------------|
| Battery | Hot-swappable 7.4V, typ. 5140 mAh Li-Polymer Battery (2S1P) 7.4V, typ. 10280 mAh Li-Polymer Battery (2S2P, Optional) | Battery Operating Time | Standard Battery: 8 hours |
| Power Rating | 19V DC | Adapter | 100-240V, 50-60Hz (19V DC) |

DIMENSIONS UNIT:MM

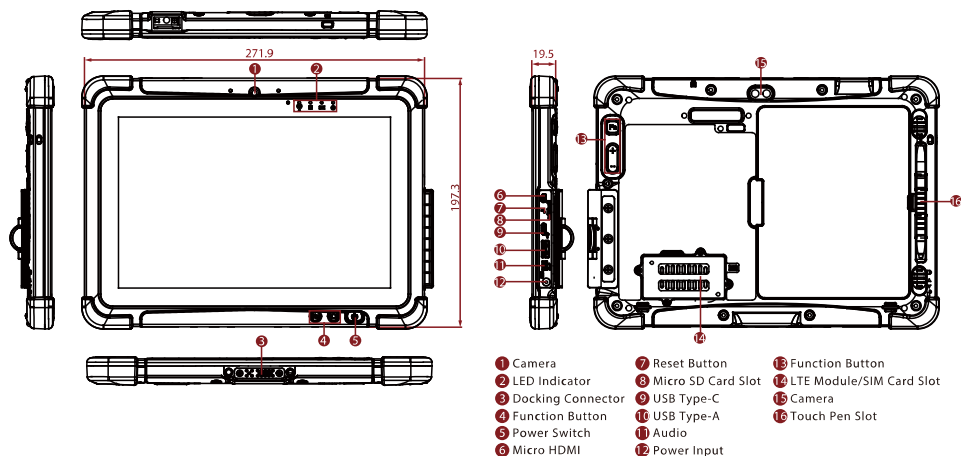

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the NoteStar Sales Team for more information.